



## JNR BEAM 200

■ JNR-8069B

The BEAM 200 adopts 1 PC 189W PHILIPS projector lamp which features high brightness and stability. It is made of a new type of high temperature strength of engineering plastics and cast aluminum casing with nice outlook. BEAM 200 is available independently controlled and linkable with each other for operation. And it is applicable for small to medium live performances, theater, studio, nightclubs and discos.


### Specification

- Input Voltage: AC 90-260V 50/60Hz
- Light Source: A 189W PHILIPS projector lamp
- Control Signal: DMX512, master-slave and sound activated or auto operation
- Control Channel: 16/20 DMX channels
- Power Consumption: 270W
- Dimensions: 405(D)\*335(W)\*473(H)mm
- Packing Dimensions: 550(D)\*455(W)\*410(H)mm
- Net Weight: 16.04kg
- Gross Weight: 18.24kg

**Detail**


- A 189W PHILIPS lamp
- 2,000 Hours lifespan and low power consumption
- 43670 LUX at 20 meters
- 3.8° Beam angle
- No need for adjustment of reflector or lamp
- Anti-reflection lenses
- 1 Color wheel with total 14 colors plus open
- Variable direction rainbow effect with speed adjustable
- 1 Static gobo wheel with 17 gobos plus open
- 1 Rotatable 8-facet prism with speed adjustable and variable direction
- Variable frost filter (hybrid effect for wash)
- Dual flag mechanical dimming system
- Variable speed strobe effect
- Preset variable/random strobe and dimming pulse effects
- Motor driven focus from near to far
- 540° pan and 270° tilt movement
- Automatic pan / tilt position correction
- 16 bit smooth and precise resolution for pan/ tilt movement
- Blue LCD Display
- 16/20 DMX channels USITT DMX-512
- DMX, stand-alone, master/slave, sound activated mode
- DMX recorder and edit function integrated

- 3-pin or 5-pin XLR serial input/output
- Fan cooling system
- 2 x 1/4 turn fastening omega clamps
- Electronic ballast and power supply
- IP20



**16.04KG**

**Light Output** (FC=LUX × 0.0929)

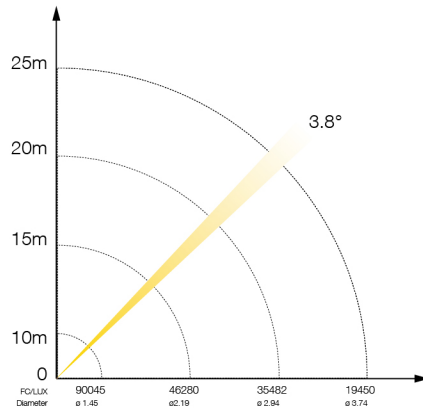

**Static Gobos**



**Colors**

